
Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-373

Product information

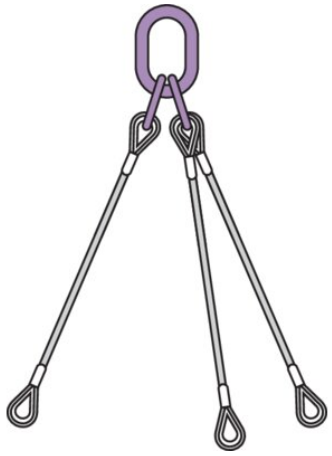

Standard steel wire rope construction: 6x36WS IWRC, 1960N/mm2
Design: Master link in one end and thimble in other ends, aluminum ferrule secured (mechanical spliced).

Load table at Technical Data -> Show table

Please specify the needed (working) length with your request.

Other rope construction and/or end-terminations such as top rings, shackles, hooks, etc.. possible on request. In that case, please contact us to discuss the possible options or specify it with your request.

... *Read more*

© November 2026 - All Rights Reserved

Lifting Solutions Group
Axel Johnson International

Wire Rope Lifting Sling WLS-373

Technical data

Diameter mm	WLL ton	WLL 0-45° t	WLL 45-60° t
3	0.25	0.25	0.18
4	0.44	0.44	0.31
5	0.68	0.68	0.49
6	0.98	0.98	0.7
7	1.34	1.34	0.96
8	1.72	1.72	1.23
9	2.18	2.18	1.56
10	2.69	2.69	1.92
11	3.25	3.25	2.32
12	3.85	3.85	2.75
13	4.55	4.55	3.25
14	5.28	5.28	3.77
16	6.9	6.9	4.93
18	8.71	8.71	6.22
20	10.75	10.75	7.68
22	13.03	13.03	9.31
24	15.5	15.5	11.07
26	18.19	18.19	13
28	21.08	21.08	15.06
32	27.56	27.56	19.69
36	34.84	34.84	24.89
40	43.17	43.17	30.84
44	52.04	52.04	37.17
48	62.06	62.06	44.33
52	75.85	75.85	52.04

© November 2026 - All Rights Reserved