


## Wire Rope Sling - 3 and 4 legs

### Product information

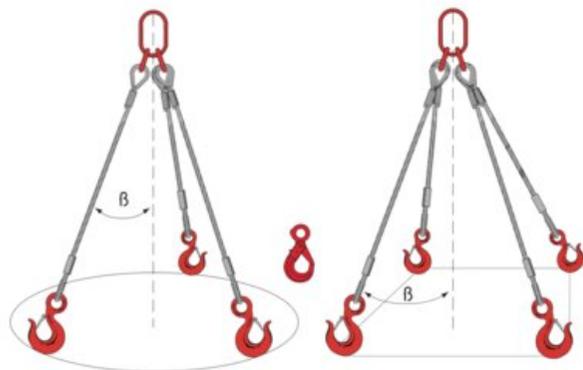

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

WLL table is valid only if the load is equally allocated on the legs

**Marking:** According to standard

**Standard:** EN 13414-1

**Safety factor:** 5:1

Part code	Rope diameter mm	WLL ton	WLL 45-60° t	Masterlink	Hook opening mm
10.70WLS47507FG	7	1	0.75	120 x 70	22.6
10.70WLS47508FG	10	2.1	1.5	120 x 70	22.6
10.70WLS47512FG	12	3	2	135 x 75	23.1
10.70WLS47514FG	14	4.5	3	150 x 90	27.7
10.70WLS47516FG	16	5.6	4	150 x 90	27.7
10.70WLS47518FG	18	7	5	170 x 95	34.5
10.70WLS47520FG	20	9	6.5	200 x 120	34.5
10.70WLS47522FG	22	11	7.8	250 x 120	40.9
10.70WLS47524FG	24	13	9.4	250 x 150	40.9
10.70WLS47526FG	26	15	10.8	250 x 150	40.9
10.70WLS47529FG	29	19	13.5	250 x 150	52.8
10.70WLS47534FG	34	28	20	300 x 200	57.7
10.70WLS47536FG	36	31.5	22.5	300 x 200	57.7
10.70WLS47538FG	38	35.5	25.5	300 x 200	76.7
10.70WLS47540FG	40	40	28.5	300 x 200	76.7