


## Wire Rope Sling - Two Leg

### Product information

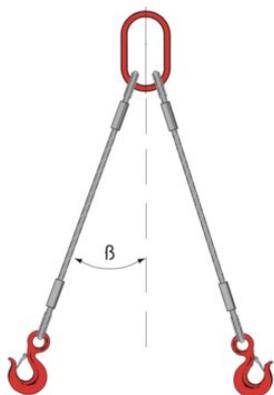

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

... [Read more](#)

**Marking:** According to standard  
**Standard:** EN 13414-1

**Safety factor:** 5:1

## Wire Rope Sling - Two Leg

### Technical data

Part code	Rope diameter mm	WLL 0-45° t	WLL 45-60° t	Masterlink	Hook opening mm
10.70WLS27507FG	7	0.7	0.5	100 X 60	22.6
10.70WLS27508FG	8	0.9	0.65	100 X 60	22.6
10.70WLS27510FG	10	1.4	1	100 X 60	22.6
10.70WLS27512FG	12	2	1.4	100 X 60	23.1
10.70WLS27514FG	14	3	2.12	120 X 70	27.7
10.70WLS27516FG	16	3.7	2.7	135 X 75	27.7
10.70WLS27518FG	18	4.7	3.4	135 X 75	34.5
10.70WLS27520FG	20	6	4.35	150 X 90	34.5
10.70WLS27522FG	22	7.2	5.2	150 X 90	40.9
10.70WLS27524FG	24	8.8	6.3	170 X 95	40.9
10.70WLS27526FG	26	10	7.2	170 X 95	40.9
10.70WLS27529FG	29	12.5	9	200 X 120	52.8
10.70WLS27532FG	32	15	11	200 X 120	52.8
10.70WLS27534FG	34	19	13.5	250 X 150	57.7
10.70WLS27536FG	36	21	15	250 X 150	57.7
10.70WLS27538FG	38	23.5	17	250 X 150	76.7
10.70WLS27540FG	40	26.5	19	250 X 150	76.7