


Wire Rope Sling - With Hook and Masterlink

Product information

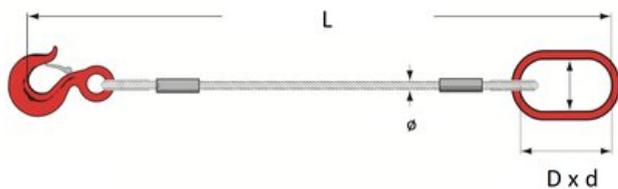

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

Marking: According to standard

Standard: EN 13414-1

Safety factor: 5:1

Part code	Rope diameter mm	WLL ton	Masterlink	Hook opening mm
10.70WLS17507FG	7	0.5	100 X 60	22.6
10.70WLS17508FG	8	0.65	100 X 60	22.6
10.70WLS17509FG	9	0.8	100 X 60	22.6
10.70WLS17510FG	10	1	100 X 60	22.6
10.70WLS17511FG	11	1.2	100 X 60	23.1
10.70WLS17512FG	12	1.4	100 X 60	23.1
10.70WLS17513FG	13	1.8	100 X 60	25.4
10.70WLS17514FG	14	2.12	120 X 70	27.7
10.70WLS17516FG	16	2.7	120 X 70	27.7
10.70WLS17518FG	18	3.4	135 X 75	34.5
10.70WLS17520FG	20	4.35	135 X 75	34.5
10.70WLS17522FG	22	5.2	135 X 75	40.9
10.70WLS17524FG	24	6.3	150 X 90	40.9
10.70WLS17526FG	26	7.2	150 X 90	40.9
10.70WLS17529FG	29	9	170 X 95	52.8
10.70WLS17532FG	32	11	170 X 95	52.8
10.70WLS17534FG	34	13.5	200 X 120	57.7
10.70WLS17536FG	36	15	200 X 120	57.7
10.70WLS17538FG	38	17	250 X 150	76.7
10.70WLS17540FG	40	19	250 X 150	76.7