


## Wire Rope Sling - With Thimbles

### Product information

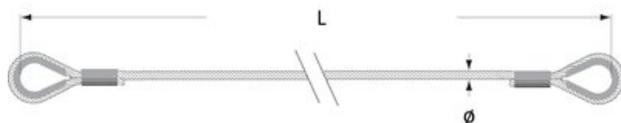

- Galvanized steel wire rope
- Proof load test at twice the nominal load
- Large opening thimbles up to  $\varnothing$  29 mm
- AFNOR thimbles from  $\varnothing$  32 mm
- Non-deformable reinforced thimbles on request
- Steel wire rope composition and diameter can vary to ensure availability
- The Working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

**Marking:** According to standard

**Standard:** EN 13414-1

**Safety factor:** 5:1

Part code	Rope diameter mm	WLL ton	Construction mm	Tensile Strength (N/mm <sup>2</sup> )	Thimble $\varnothing$ mm
10.70WLS11307FE	7	0.5	6 x 19 APP	1,770	31 x 49
10.70WLS11308FE	8	0.65	6 x 19 APP	1,770	31 x 49
10.70WLS11309FE	9	0.8	6 x 19 APP	1,770	37 x 60
10.70WLS11310FE	10	1	6 x 19 APP	1,770	37 x 60
10.70WLS11311FE	11	1.2	6 x 19 APP	1,770	43 x 68
10.70WLS11312FE	12	1.4	6 x 19 APP	1,770	43 x 68

10.70WLS11313FE	13	1.8	6 x 36 APP	1,770	49 x 78
10.70WLS11314FE	14	2.12	6 x 36 APP	1,770	49 x 78
10.70WLS11316FE	16	2.7	6 x 36 APP	1,770	55 x 87
10.70WLS11318FE	18	3.4	6 x 36 APP	1,770	58 x 92
10.70WLS11320FE	20	4.35	6 x 36 APP	1,770	62 x 98
10.70WLS11322FE	22	5.2	6 x 36 APP	1,770	66 x 105
10.70WLS11324FE	24	6.3	6 x 36 APP	1,770	70 x 110
10.70WLS11326FE	26	7.2	6 x 36 APP	1,770	73 x 115
10.70WLS11329FE	29	9	6 x 36 APP	1,770	81 x 127
10.70WLS11332FE	32	11	6 x 36 APP	1,770	72 x 126
10.70WLS11334FG	34	13.5	6 x 36 APP	1,960	78 x 137
10.70WLS11336FG	36	15	6 x 36 APP	1,960	84 x 147
10.70WLS11338FG	38	17	6 x 36 APP	1,960	90 x 158
10.70WLS11340FG	40	19	6 x 36 APP	1,960	96 x 168
10.70WLS11342FG	42	22.5	6 x 36 SC	1,960	96 x 168
10.70WLS11344FG	44	25	6 x 36 SC	1,960	104 x 182
10.70WLS11346FG	46	27	6 x 36 SC	1,960	104 x 182
10.70WLS11348FG	48	29.5	6 x 36 SC	1,960	112 x 200
10.70WLS11352FG	52	34.5	6 x 36 SC	1,960	120 x 210
10.ZZ103158	58	43	6 x 36 SC	1,960	145 x 258
10.ZZ103164	64	55	6 x 36 SC	1,960	170 x 290
10.ZZ103168	68	65	6 x 36 SC	1,960	170 x 290
10.ZZ103184	84	100	6 x 36 SC	1,960	205 x 338